


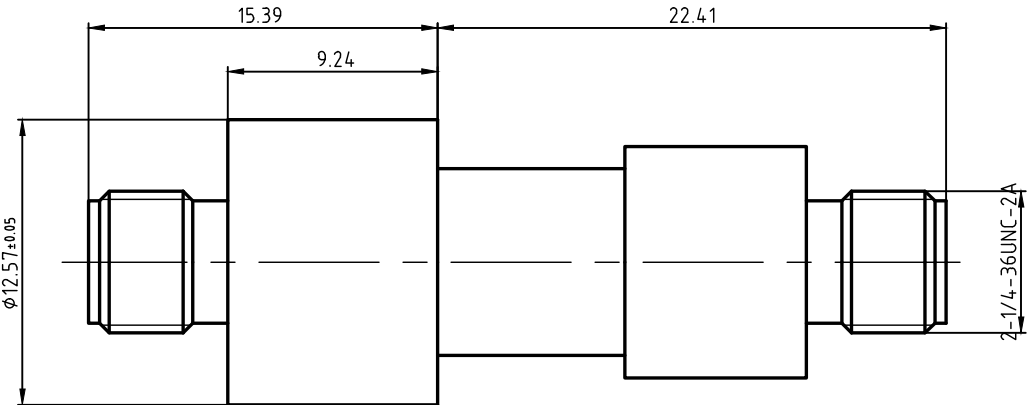

NOTES:
1. MATERIALS AND FINISHES:
BODY – STAINLESS STEEL
INNER CONTACT – BERYLLIUM COPPER & Iron–Nickel Alloy 4J50
INSULATOR – GLASS & PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. VOLTAGE RATING: 700 VRMS
C. SHIELD: GROUNDED
D. FREQUENCY RANGE: DC – 20 GHz
E. HERMETIC SEA: 1*10⁻⁸ CC/SEC OF HELIUM AT 1ATM

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

MATL:	UNLESS OTHERWISE SPECIFIED			DFTM: Huang		Somefly technology Co.,Ltd					
	ALL DIMENSIONS ARE IN mm MACHINED SURFACES FINISH 1.6RMS MAX. REMOVE ALL BURRS 0.15×45°MAX. BREAK MACHINE CORNERS 0.15×45°D MAX. FILLET R. TOLERANCES ON DECIMALS .X ±0.2 .XX ±0.1 ANGLES±2° FRACTIONS±N/A			DATE: 2026.08.17							
	 			CHKD HeTong		SMA直式母转母不锈钢焊接气密转接器 SMA-KK-H					
				DATE: 2026.08.17							
USED ON:				APPD: Stone							
SCALE: 2/1	DWG SIZE A4	DO NOT SCALE DRAWING		SURFACE (mm²) XX	WEIGHT (g) XX	DATE: 2026.08.17	SHT		1020564	REV	A.0